

**POLYROOF**  
ADVANCED LIQUID ROOFING

# Protec FW-25

Permanent Liquid Roofing System



# Introducing Enviro Thermal Coatings



Our vision is simple: offer industry-leading and innovative renovation products that provide protection in any climate. The products we distribute are easy to apply and priced competitively.



# About Protec FW-25 Permanent Roof Coating System

Protec FW-25 is a flexible polyester hybrid resin coating system. Manufactured in the United Kingdom, our liquid-applied roofing provides a cost-effective solution for flat roof restoration or new construction. With no heat or intensive labor required, you can enjoy a roofing system that's easy to apply, dries fast (thanks to its RapidCure technology), and has a 25-year warranty.





# RapidCure Technology

Our liquid-applied roofing dries fast. The amount of catalyst added sets the rate to which the product dries. After only 30-60 minutes, you can walk on the newly-applied system, making application that much easier.





# Use for New Construction or Restoration



Our system provides permanent protection on new roof construction or restoration. Suitable for installation on existing or new ISO foam substrate. Can restore any flat installation roof (bitumen, tpo, decking, cement, asphalt, BUR, PVC and any other roof coatings).

# 100% Waterproof



Impervious and resistant to ponding water and heavy rainfalls



Seamless protection between roof details and membrane to create a waterproofing shield




Can also waterproof vertical angles, making it possible to fully protect parapet walls


# Other Benefits




Over 37 years of research and proven experience

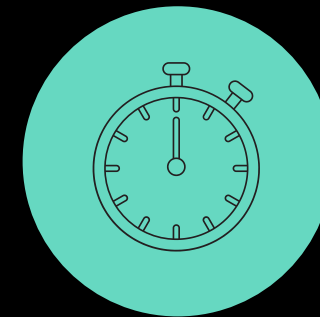

Fastest liquid-applied roofing to apply on the market.

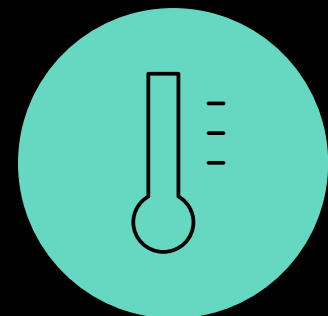

Can be applied in cold weather down to 34°F (1°C)

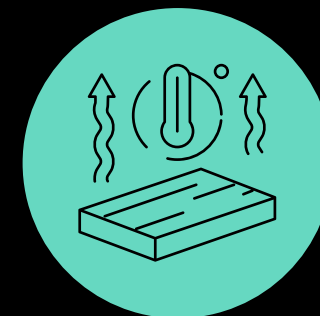

New IRR additive provides thermal insulation and reduces HVAC costs

**No specialized equipment needed for installation**

---





# Guarenteed to last up to 25 years

Get the reassurance you need with a 25-year warranty.



# Technical Specifications




- Applied product thickness (cured) is 79 mils and 0.45 lb/ft<sup>2</sup> on average.
- Resistant to foot traffic and mechanical indentations
- Water vapor permeability rate of 0.003 oz/ft<sup>2</sup>/day
- Coverage of 88 ft<sup>2</sup> per 4-gallon pail (based on medium application rate used)
- 83 lb/ft<sup>3</sup> resin density (liquid form)



# Can also be applied to balconies & walkways

Our system's extreme durability means it can withstand high-traffic areas, such as balconies, walkways, terraces, and stairways.

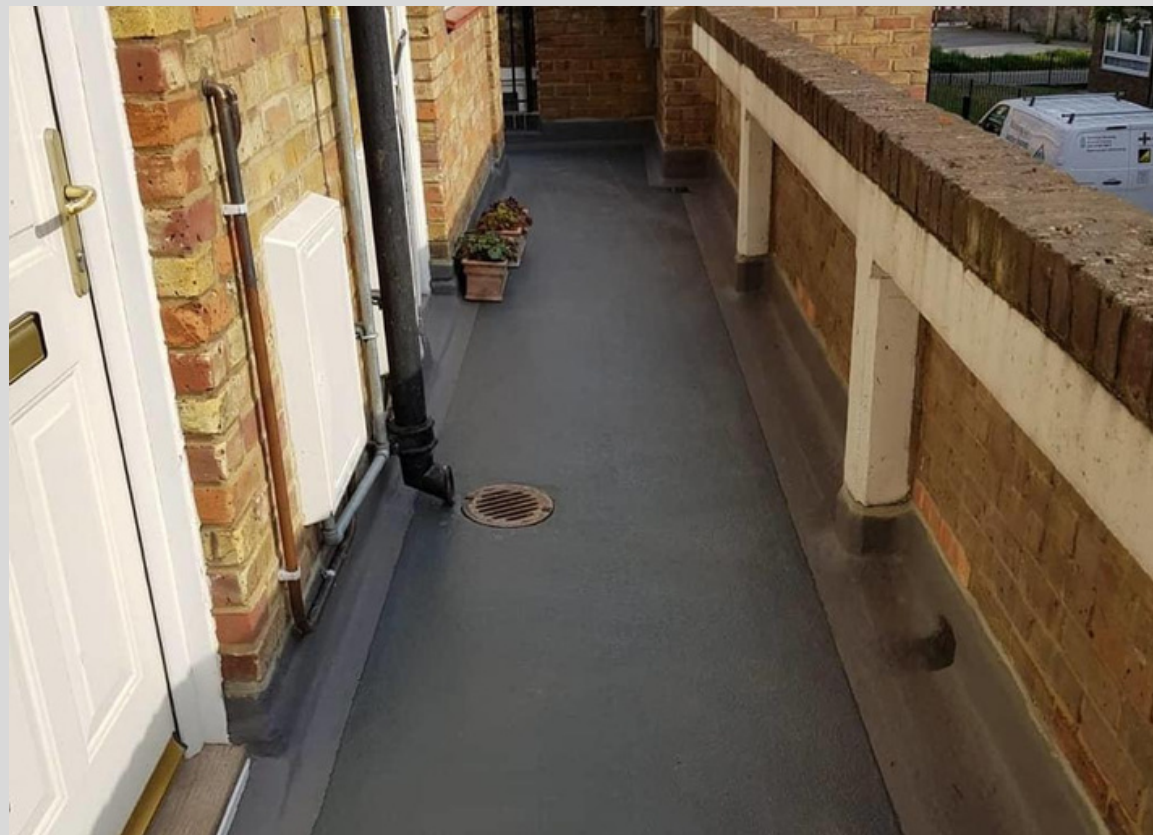





## Contact Us

503-710-7705

[adrian.promisedlandinc@gmail.com](mailto:adrian.promisedlandinc@gmail.com)

[www.promisedland.dev](http://www.promisedland.dev)

Forte Tech Coatings  
Oregon Distributor

